


G2 misuratori

THE VALUE OF METERING



Made in ITALY

SMART METERS

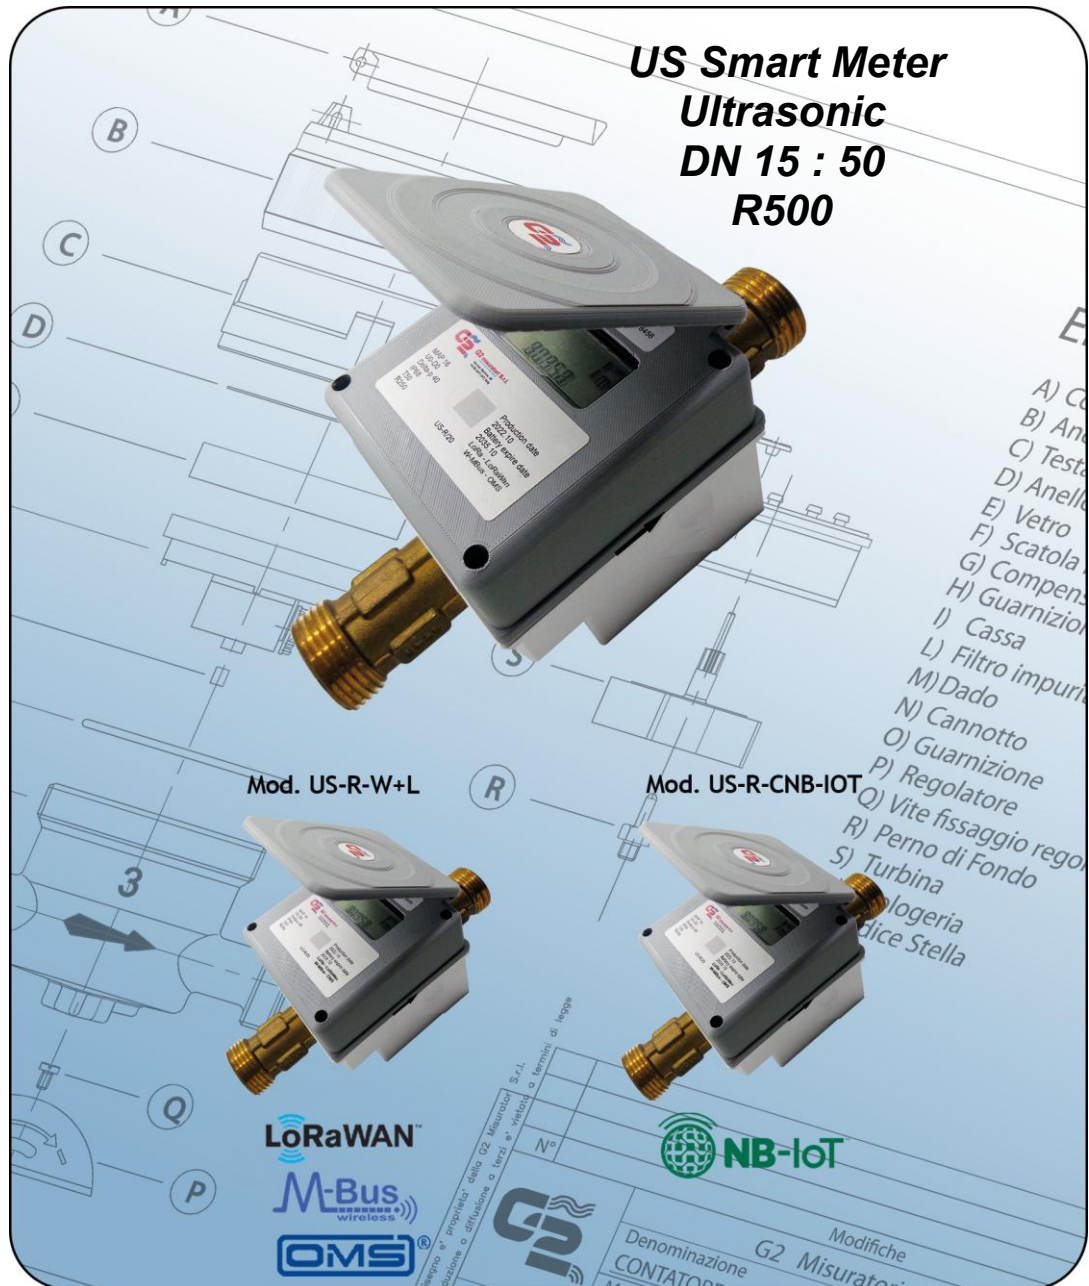

- ❑ Ultrasonic meter suitable for domestic and commercial outdoor applications, featuring static measurement technology with no moving parts
- ❑ Model US-R-W+L sizes from DN 15 to DN 50, temperature class T30/T50, measuring range in all positions R500 – Protection rating IP68: resin-coated, integrated wireless communication with **LoRaWAN/ OMS W-Mbus protocols with automatic switch**
- ❑ Model US-R-CNB-IOT with sizes from DN 15 to DN 50, temperature class T30/T50, measuring range in all positions R500 – IP68 protection rating: resin-coated, integrated **NBIoT** wireless communication **with MQTT* protocol**
- ❑ Bidirectional measurement
- ❑ Large **LCD** display showing total volume, instantaneous flow rate, battery indicator, alarms, flow direction, water temperature and display test
- ❑ Display options for the measured volume: net, normal flow only, alternating normal/reverse
- ❑ Battery life >13 years, under normal conditions of use, depending on the radio protocol
- ❑ Data logger function with optional NFC module
- ❑ Local communication: optical port Corpo in ottone resistente nel tempo, attacchi filettati
- ❑ U0-D0: No straight pipe runs are required upstream or downstream of the meter
- ❑ All models are certified for use with drinking water in accordance with Ministerial Decree **174 of 6 April 2004**
- ❑ All models are **MID**-approved in accordance with the current Directive (Module B+D), in compliance with **OIML R49** and **ISO 4064** standards
- ❑ Available in a LoRaWAN-only or W-Mbus OMS-only version

SMART METERS



| Technical specifications – DN in mm | 15 | 20 | 25 | 32 | 40 | 50 |
|---|-------------------|-------------|-------------|-------------|-------------|--------------------------|
| Threads | G 3/4" | G 1" | G 1 1/4" | G 1 1/2" | G 2" | G 2 1/2" |
| Permanent flow rate Q ₃ (m ³ /h) | 2,5 | 4,0 | 6,3 | 10 | 16 | 25 |
| Overload capacity Q ₄ (m ³ /h) | 3,125 | 5,0 | 7,875 | 12,5 | 20 | 31,25 |
| Transition flow rate Q ₂ [MPE ±2%] (m ³ /h) | 0,008 | 0,0128 | 0,02016 | 0,032 | 0,0512 | 0,08 |
| Minimum flow rate Q ₁ [MPE ±5%] (m ³ /h) | 0,005 | 0,008 | 0,0126 | 0,02 | 0,032 | 0,05 |
| Electromagnetic Class | E1 | | | | | |
| Accuracy class | II | | | | | |
| Operating environmental conditions | -25 °C ... +55 °C | | | | | |
| Measuring range R * | 500 | 500 | 500 | 500 | 500 | 500 |
| Starting flow (m ³ /h) | 0,002 | 0,004 | 0,005 | 0,009 | 0,011 | 0,011 |
| Maximum permissible operating pressure MAP (bar) | 16 | 16 | 16 | 16 | 16 | 16 |
| Pressure drop ΔP (bar) | <0.4 | <0.4 | <0.4 | <0.4 | <0.4 | <0.4 |
| Maximum reading for normal flow (m ³) | 99999.99999 | 99999.99999 | 99999.99999 | 99999.99999 | 99999.99999 | 99999.99999 |
| Smallest unit of measurement (l) | 1 | 1 | 1 | 1 | 1 | 1 |
| L (mm) ** | 110 | 190 | 260 | 260 | 300 | 300 Threaded/200 flanged |
| L1 (mm) | 97 | 97 | 97 | 97 | 97 | 97 |
| L2 (mm) | 204 | 294 | 380 | 380 | 428 | 428 |
| H) (mm) | 91 | 91 | 91 | 128 | 139 | 139 |
| H1 (mm) | 31 | 28 | 25 | 29 | 36 | 36 |
| W (mm) | 90 | 90 | 90 | 90 | 90 | 90 |

* Other R models available on


** Other lengths available on request

*** Models available with a pulse emitter for connection to a separate radio module, on request

Models:
US-AI-R-W+L
US-AI-R-CNB-IOT
DN 15: 20
R800
with a stainless steel measuring tube




display



Technical specifications of the LoRaWAN protocol

| | Fixed network |
|-------------------------|---|
| Network type | Frequency: 868 MHz, LoRaWAN certified protocol (915 MHz frequency on request) |
| Data transmitted | Sensor ID, consumption data, hardware status, battery level, alarms: tampering (removal), reverse flow, low battery, leaks, on-site temperature, on request |
| Edit configuration data | Possible from remote or via a radio terminal |
| Flexibility | On request the system automatically switches between the protocols LoRaWAN and W-Mbus OMS |
| Activation | OTAA-ABP |
| Transmission interval | 1 daily reading and 2 daily history reports |
| Transmission distance | Up to 14 km in ideal conditions |


Overall dimensions

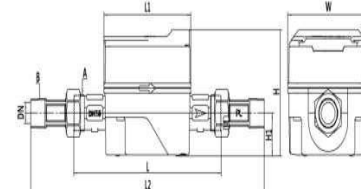

Technical specifications of the OMS Wireless-Mbus protocol

| | Walk-by/Drive-by |
|-------------------------|---|
| Network type | Frequency 868 MHz, W-MBus compliant with OMS |
| Data transmitted | Sensor ID, consumption data, hardware status, battery level, alarms: tampering (removal), reverse flow, low battery, leaks, on-site temperature, on request |
| Edit configuration data | Possible via radio terminal |
| Transmission distance | Up to 500 metres in ideal conditions |


Typical error curve

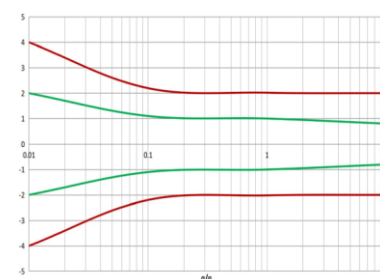

Technical specifications for NB-IoT transmission

| | |
|-------------------------|---|
| Transmission | Two-way communication over a fixed network using the NB-IoT cellular standard |
| Transmission interval | Each 3 days (customisable) |
| Communication protocol | MQTT |
| Edit configuration data | Available via remote access and/or local NFC |
| Data transmitted | Sensor ID, consumption data, hardware status, alarms, |
| Alarms transmitted | Mechanical tampering (removal), reverse flow, low battery, etc.. |
| Communication interface | NFC for installation, configuration and data recovery |
| Data-logger | via NFC, with data recovery with mobile App |

Pressure drop diagram

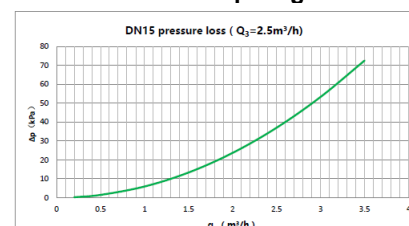

The Company reserves the right to make changes to technical specifications and product illustrations – 04/26



G2 misuratori S.r.l. -
Via San Martino, 38 – 14100 ASTI (AT) – ITALY
Tel. +39. 0141.721787– Fax +39.0141.702280
E-mail: info@g2misuratori.it
Http://www.g2misuratori.it



Filiale Centro-Sud
Via Fontanelle, 3 – 00020 RIOFREDDO (RM) – ITALY
Tel. e Fax +39.0774.920216
E-mail: centrosud@g2misuratori.it



ISO 9001 - ISO 14001 - ISO 45001
 UNI/PdR 125:2022

